




2ft Bare - Single Batten

- Light white powder coated steel body
- 0.5mm pressed metal construction
- Bare light for easy tube change
- Large size terminal blocks, easy to fit cable
- 2 years warranty on the complete fitting
- Nickel-cadmium battery (NiCad) 1500mAh 7.2V



SINGLE BATTEN



T8 9W LED LIGHT SOURCE



COOL DAYLIGHT 6000-6500K



STURDY STEEL CONSTRUCTION



ENERGY SAVING



REDUCED CONSUMPTION



LONG LIFE NiMH BATTERY




2 YEAR WARRANTY*

TEST DATA

EFSBLB-S



DIMENSIONS: W620 X D108 X H70MM

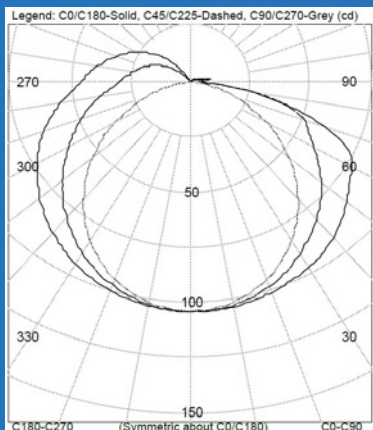

Emergency Classification

| | |
|------|-----|
| C0 | D63 |
| C90 | D25 |
| C180 | D80 |

Performance Summary

| | |
|-------------------|----------|
| LUMINOUS FLUX | 411LM |
| LUMINAIRE POWER | 4.30W |
| LUMINOUS EFFICACY | 95.7LM/W |

Classifications

| C0 Plane represents: C0 | C90 Plane represents: C90, C270 | C180 Plane represents: C180 |
|-------------------------|---------------------------------|-----------------------------|
| A100 | A100 | A100 |
| B100 | B100 | B100 |
| C100 | C80 | C100 |
| D63 (21.1M) | D25 (15.3M) | D80 (22.8M) |
| E80 | E63 | E80 |

EzyFit 2 x 9W 600mm Bare LED Batten. Folded/welded metal base with white finish, extent ~ 622 x 103 x 45mm deep. Two LED 9W LED tubes centred 53mm apart and 17mm below reflector. Two Min Hua Electric "204030360586" AC170-265V 50Hz electronic drivers. Lamp in C180 plane energised during test. Tested at 6.98 Vdc. For full product details please contact EzyFit.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
*WARRANTY FOR COMPLETE FITTING ONLY

Bold entries represent the classification yielding the maximum spacing between luminaires as ranked by Tables 5.1-5.5 of AS2293.3 2005 Part 1 when mounted at a height of 2.7m. Spacing distance is bracketed. For the ranking and spacing distance of luminaires mounted at other heights, refer to tables 5.1-5.5

