



COOL DAYLIGHT  
6000-6500K




VANDAL  
GUARD

# 2ft Vandal Guard - Single Batten

- Light white powder coated steel body
- 0.5mm pressed metal construction
- Quality powder coated cage
- Large size terminal blocks, easy to fit cable
- 2 years warranty on the complete fitting
- Nickel-cadmium battery (NiCad) 1500mAh 7.2V



SINGLE BATTEN



T8 9W LED  
LIGHT SOURCE



COOL DAYLIGHT  
6000-6500K



STURDY STEEL  
CONSTRUCTION



ENERGY  
SAVING



REDUCED  
CONSUMPTION



LONG LIFE  
NiMH BATTERY




2 YEAR  
WARRANTY\*

## TEST DATA

## EFSBLV-S



DIMENSIONS: W620 X D108 X H97MM

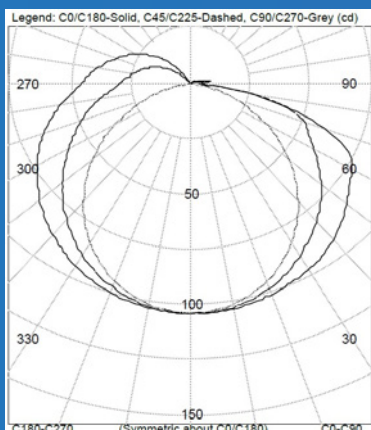

### Emergency Classification

C0	D63
C90	D25
C180	D80

### Performance Summary

LUMINOUS FLUX	411LM
LUMINAIRE POWER	4.30W
LUMINOUS EFFICACY	95.7LM/W

### Classifications

C0 Plane represents: C0	C90 Plane represents: C90, C270	C180 Plane represents: C180
A100	A100	A100
B100	B100	B100
C100	C80	C100
D63 (21.1M)	D25 (15.3M)	D80 (22.8M)
E80	E63	E80

EzyFit 2 x 9W 600mm Bare LED Batten. Folded/welded metal base with white finish, extent ~ 622 x 103 x 45mm deep. Two LED 9W LED tubes centred 53mm apart and 17mm below reflector. Two Min Hua Electric "204030360586" AC170-265V 50Hz electronic drivers. Lamp in C180 plane energised during test. Tested at 6.98 Vdc. For full product details please contact EzyFit.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

\*WARRANTY FOR COMPLETE FITTING ONLY

Bold entries represent the classification yielding the maximum spacing between luminaires as ranked by Tables 5.1-5.5 of AS2293.3 2005 Part 1 when mounted at a height of 2.7m. Spacing distance is bracketed. For the ranking and spacing distance of luminaires mounted at other heights, refer to tables 5.1-5.5

